

VG4000 Series

VG4000 Electric Zone Valves



VG4000 Electric Zone Valves

VG4000 Series High-Capacity/High-Closeoff Electric Zone Valves are designed to regulate the flow of water in response to the demand of a controller in zone and Variable Air Volume (VAV) reheats coil applications. The high-capacity/high-closeoff capability of the VG4400xx-C and VG4800xx-C also makes this family of valves an ideal choice for fan coil and baseboard radiation applications. Normally Closed (N.C.) VG4000 series valve is designed for use with VA-7010 Series on/off control actuators and VA-7450 Series floating or proportional control actuators. These electric actuators can be order separately for field installation.



Figure 1: VG4000 Series High-Capacity/High-Closeoff Electric Zone Valves

Features and Benefits

Forged Brass Body and Stainless Steel Stem and Spring	Ensures long life
Ideal for Zone, VAV Reheat Coil, Fan Coil, and Baseboard Radiation Applications	Offers a broad range of applications
EPT Rubber Plug for Bubble-Tight Shutoff	Maximizes energy savings
Easy, Field-Replaceable Packing	Shortens repairing time
Actuator can be Field Installed After Piping	Simplifies installation in confined locations
Built-In Return Spring for VA-7010 Series Electric Actuators	Allows the valve to return to normal position when the actuator is de-energized

Table 1: Ordering Code for VG4000 Series Zone Valve with Threaded (Internal BSP) End Connections

Valve Code Number	Size (in.)	Kv	Close-off Pressure* (PSIG)	On/Off	On/Off	On/Off	Floating	0 ~ 10VDC Proportional
				24VAC 50/60Hz	120VAC 50/60Hz	230VAC 50/60Hz	24VAC 50/60Hz	24VAC 50/60Hz
				VA-7010-8001**	VA-7010-8502-C	VA-7010-8503-C	VA-7450-1001**	VA-7452-1001**
Two-Way N.C. (Push-Down-to-Open, PDT0)								
VG4400FC-C	1/2	2.1 ~ 2.2	50 (345kPa)	Yes	Yes	Yes	Yes	Yes
VG4400GC-C	3/4	2.5 ~ 2.6	50 (345kPa)	Yes	Yes	Yes	Yes	Yes
VG4400HC-C	1	3.0 ~ 3.1	50 (345kPa)	Yes	Yes	Yes	Yes	Yes
Three-Way N.C. (Push-Down-to-Open, PDT0)								
VG4800FC-C	1/2	2.1 ~ 2.2	50 (345kPa)	Yes	Yes	Yes	Yes	Yes
VG4800GC-C	3/4	2.5 ~ 2.6	50 (345kPa)	Yes	Yes	Yes	Yes	Yes

* The close-off pressure for three-way mixing valves is 50 psig(345kPa) on the normally closed port and 25 psig(172kPa) on the normally open port.

** Imported types

Table 2: Drop (PSI) vs. Flow Rate in Gallons per Minute (GPM)

Pipe Size (Sweat or Threaded End Connections)	1/2 in.	3/4 in.	1 in.
Kv	2.1 ~ 2.2	2.5 ~ 2.6	3.0 ~ 3.1
Pressure Drop (PSI)	Flow Rate (GPM)		
1	2.6	3.0	3.6
2	3.6	4.3	5.1
3	4.5	5.3	6.3
4	5.1	6.1	7.3
5	5.8	6.8	8.1
6	6.3	7.5	8.9
7	6.8	8.0	9.6
8	7.3	8.6	10.3
9	7.7	9.1	10.9
10	8.1	9.6	11.5
11	8.5	10.1	12.0
12	8.9	10.5	12.6
13	9.3	11.0	13.1
14	9.6	11.4	13.6
15	10.0	11.8	14.0
16	10.3	12.2	14.5
17	10.6	12.5	15.0
18	10.9	12.9	15.4
19	11.2	13.3	15.8
20	11.5	13.6	16.2
21	11.8	13.9	16.6
22	12.1	14.3	17.0
23	12.3	14.6	17.4
24	12.6	14.9	17.8
25	12.9	15.2	18.1
26	13.1	15.5	18.5
27	13.4	15.8	18.8
28	13.6	16.1	19.2
29	13.9	16.4	19.5
30	14.1	16.7	19.9

Actuator Assemblies

VG4400/4800 Series High-Capacity/High-Close-off Electric Zone Valves are specifically designed for use with VA-7010 Series on/off control actuators and VA-7450 Series floating or proportional control actuators.

Note: For soldering reasons, factory-ordered assemblies featuring sweat end connections are shipped with the actuator separated from the valve body.

Operation

IMPORTANT:

It is recommended that the VG4000 Series Valve be mounted within 90 degrees of the upright position.

VA-7010 Series (On/Off Control)

When power is applied to the actuator, the motor drives the gear assembly, pushing the valve stem down against the force of the return spring. When power is removed, the actuator retracts, allowing the return spring to move the valve stem up in the direction of its normal position. Figure 2 illustrates the effect that valve stem movement has on flow.

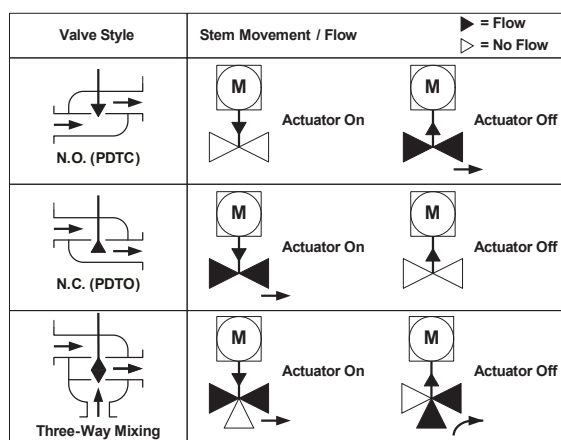


Figure 2: Effect of Valve Stem Movement on Flow

VA-7450-1001 (Floating Control)

When power is applied to the Common (blue) and Down (red) wires, the motor drives the gear assembly, pushing the valve stem down against the force of the return spring. When power is applied to the Common (blue) and Up (white) wires, the actuator retracts, allowing the return spring to move the valve stem up to its normal position. When power is removed, the actuator will hold its position.

If power remains applied to either the red or white wire, the actuator will time out and shut the motor off after approximately 80 seconds, holding its current position. Figure 2 illustrates the effect that valve stem movement has on flow.

VA-7452-1001 (Proportional Control)

When the control signal increases, the actuator motor drives the gear assembly, pushing the valve stem down against the force of the return spring.

When the control signal decreases, the actuator retracts, allowing the return spring to move the valve stem up in the direction of its normal position.

Upon loss of power, the actuator will hold its position. Figure 2 illustrates the effect that valve stem movement has on flow.

Dimensions

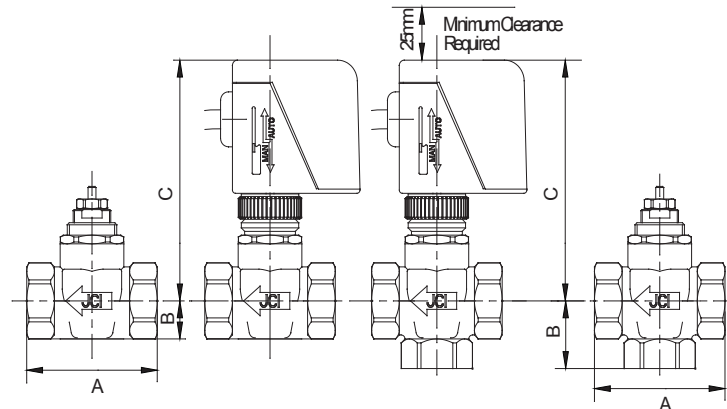


Figure 3: VA-7010 Actuated VG4000 Series Valve Dimensions, in. (mm) (Refer to Table 3)

Table 3: Dimensions for VA-7010 Actuated VG4400/4800 Series Assemblies with Threaded (Internal BSP) End Connections, mm

Dimension*	Two or Three-Way Valve Assemblies				
	Two-way 1/2 in. (DN15)	Two-way 3/4 in. (DN20)	Two-way 1 in. (DN25)	Three-way 1/2 in. (DN15)	Three-way 3/4 in. (DN20)
A	66	66	90	66	66
B	18	18	24	32	32
C	109	109	109	109	109

*For actuator-only dimensions, refer to the VA-7010 Series Electric On/Off Actuator Product/Technical Bulletin

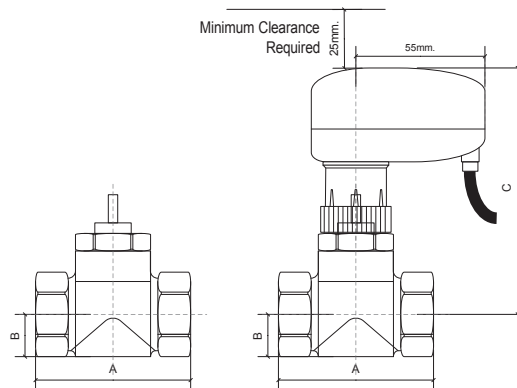


Figure 4: VA-7450 Actuated VG4000 Series Valve Dimensions, in. (mm) (Refer to Table 4)

Table 4: Dimensions for VA-7450 Actuated VG4000 Series Assemblies with Threaded (Internal BSP) End Connections, mm

Dimension*	Two or Three-Way Valve Assemblies				
	Two-way 1/2 in. (DN15)	Two-way 3/4 in. (DN20)	Two-way 1 in. (DN25)	Three-way 1/2 in. (DN15)	Three-way 3/4 in. (DN20)
A	66	66	90	66	66
B	18	18	24	32	32
C	105	105	105	105	105

* For actuator-only dimensions, refer to the VA-7450 Electronic Valve Actuator Product/Technical Bulletin

Technical Data

Product	VG4000 Series High-Capacity/High-Closeoff Electric Zone Valves					
Models	VG4400FC-C	VG4400GC-C	VG4400HC-C	VG4800FC-C	VG4800GC-C	
Body Rating	PN16 Maximum Pressure: 300 PSIG (2,067 kPa)					
Service*	Hot and Cold Water for HVAC Systems					
Valve Sizes	1/2 in. (DN15)	3/4 in. (DN20)	1 in. (DN25)	1/2 in. (DN15)	3/4 in. (DN20)	
Maximum Close-off Pressure	50 PSIG					
Leakage	0.01% of Maximum Flow; 100% Protection Tested					
End Connections	Threaded (Internal BSP)					
Stroke	3mm					
Body Type	Two-Way PDTO(NC)	Two-Way PDTO(NC)	Two-Way PDTO(NC)	Three-Way Mixing	Three-Way Mixing	
Material						
Valve Body	Forged Brass					
Packing Nut and Cage	Brass					
Stem	ANSI 300 Stainless Steel					
Spring	Stainless Steel					
Plug	EPT Rubber					
Packing	Two EPT Rubber O-Rings					
Fluid Temperature Limits	2 ~ 95°C (35 ~ 203°F)					
Ambient Temperature Limits						
Flow Characteristics						
Valve Body Shipping Weight, lb (kg):						
Actuator Shipping Weight, lb (kg)						

ERROR: undefined
OFFENDING COMMAND: IRDTZX+Maurea-L
STACK: